


HUSH ROUND E26 BULB

Designed by David Trubridge

(1017-D)

pln.

Overall Dimensions - Model: 1017D (E26)

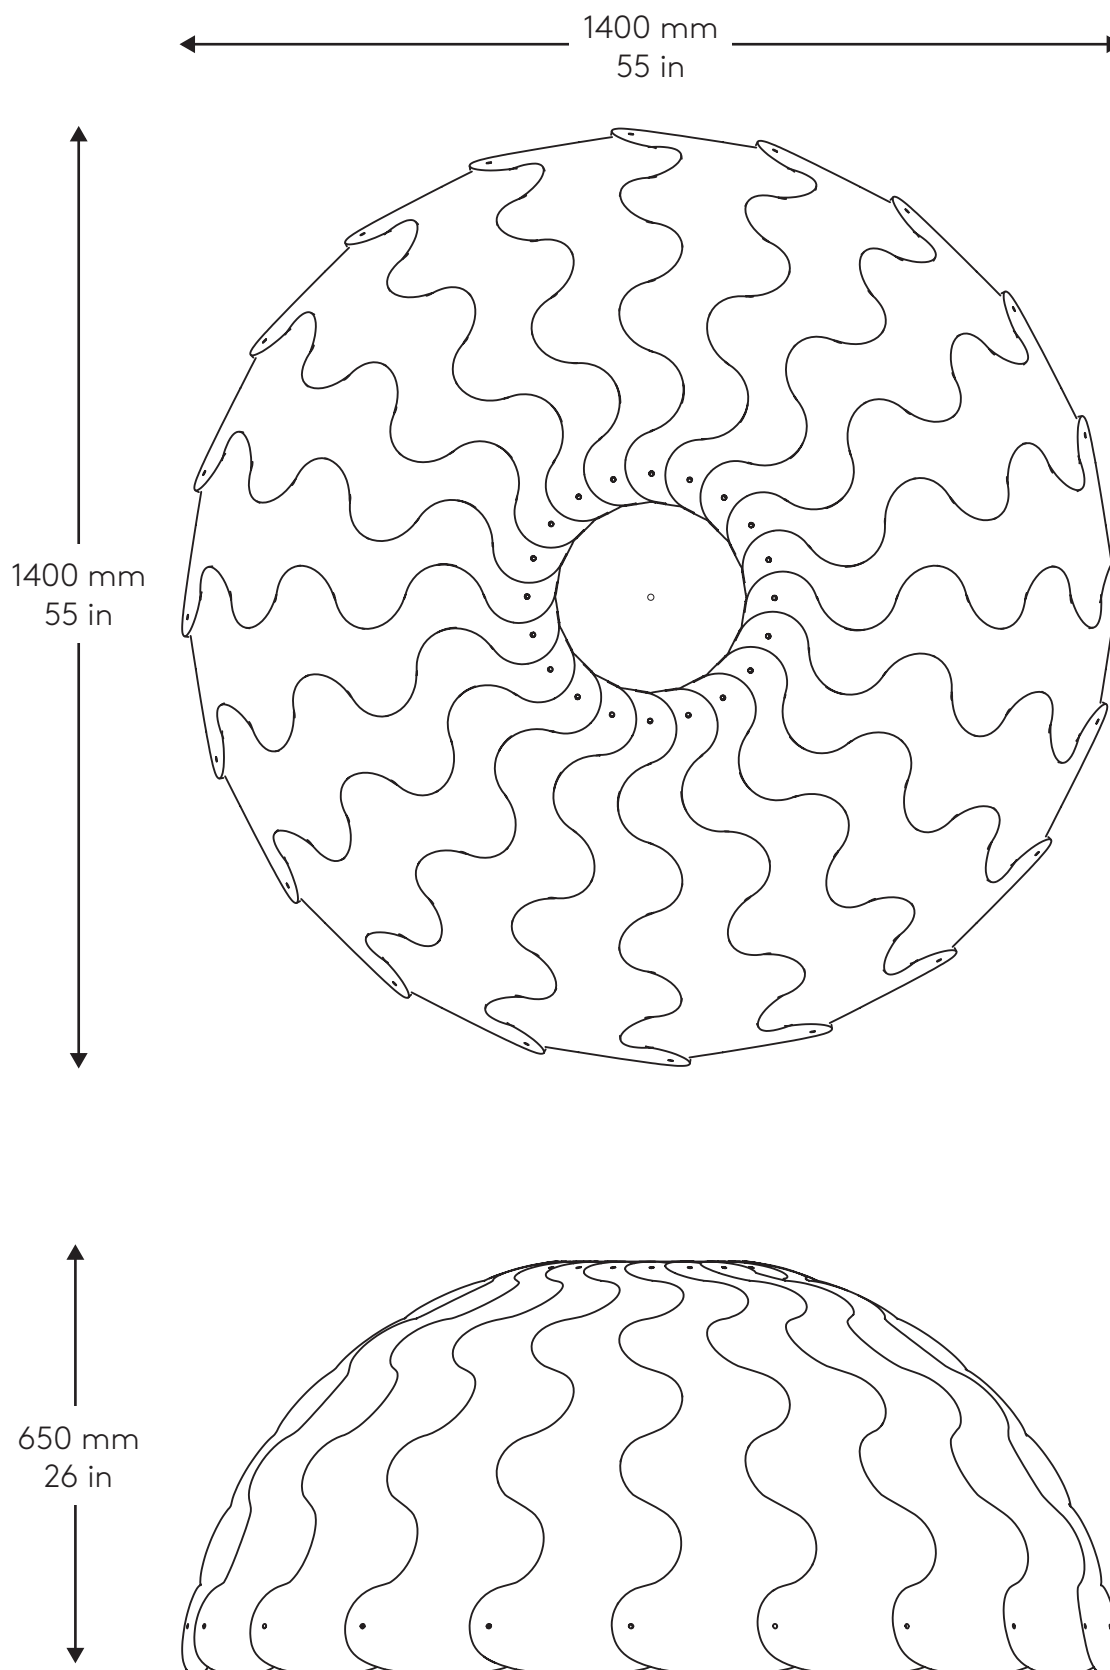

HUSH ROUND E26 BULB


Designed by David Trubridge

(1017-D)


pln.

Contents (not to scale)


Please double check all components are present and quantities are correct before beginning assembly

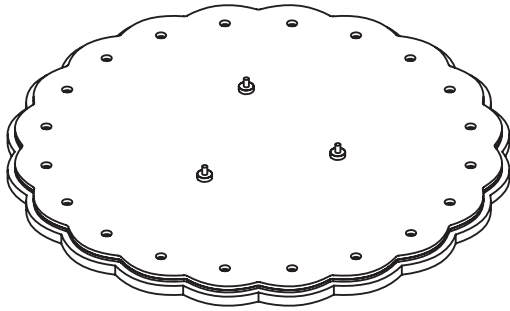

x1
Top Panel Assembly
(Power cable not shown)

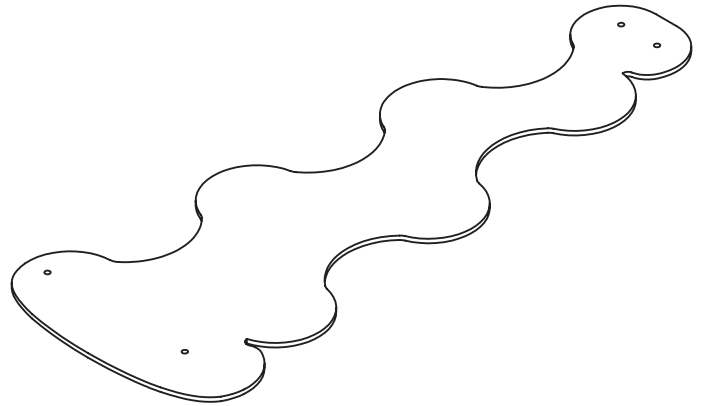

x20
Tapered
Felt Panels




x1
Triple Swage Cable




x40 (+5)
Small Ratchet Rivets
(13mm)



x40 (+5)
Large Ratchet Rivets
(19mm)



x1
Cone Gripper
with Base





x1
Folded Cardboard
Pillars

HUSH ROUND E26 BULB

Designed by David Trubridge
(1017-D)




Step 1 - Top Panel Ratchet Rivet Assembly

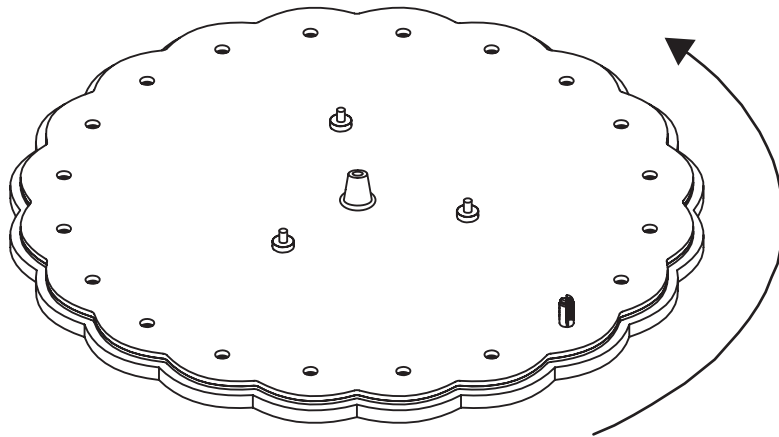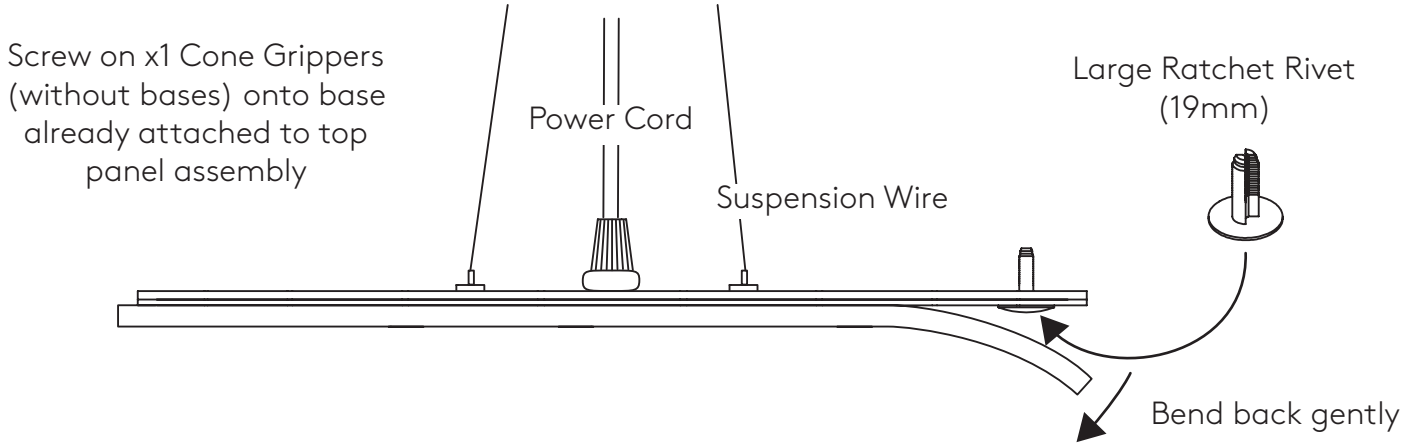

Insert Large Ratchet Rivets (19mm) in all holes around edge.

(power cord and suspension wires not shown)

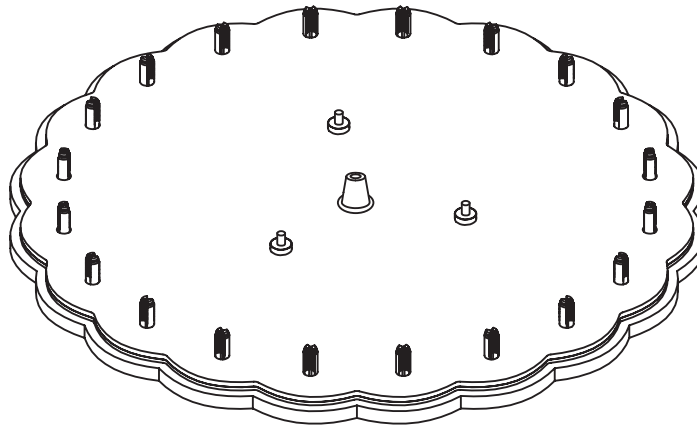


HUSH ROUND E26 BULB

Designed by David Trubridge

(1017-D)

pln.

Step 2 - Pop out side panel plugs

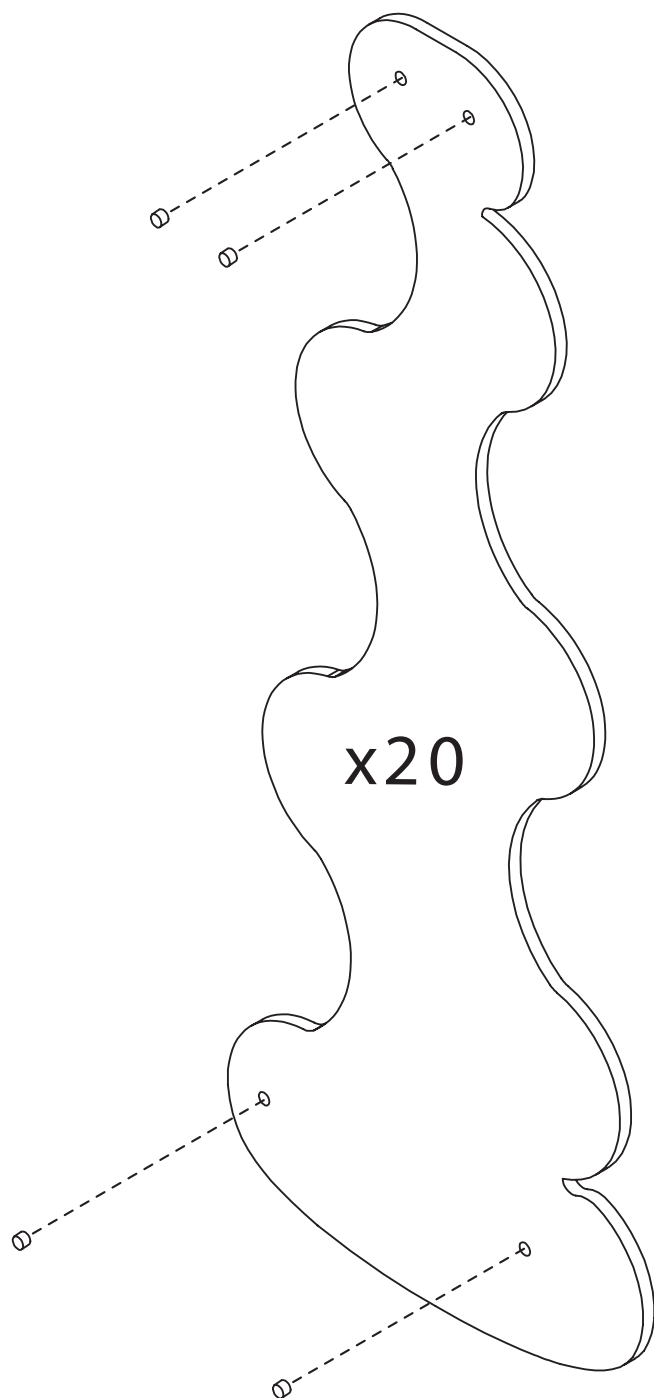

Push out the 4 plugs per panel to make way for the plastic clips.


HUSH ROUND E26 BULB

Designed by David Trubridge
(1017-D)

pln.

Step 3 - Top Panel to Side Panel Assembly

Assemble on a large clean surface or on floor.

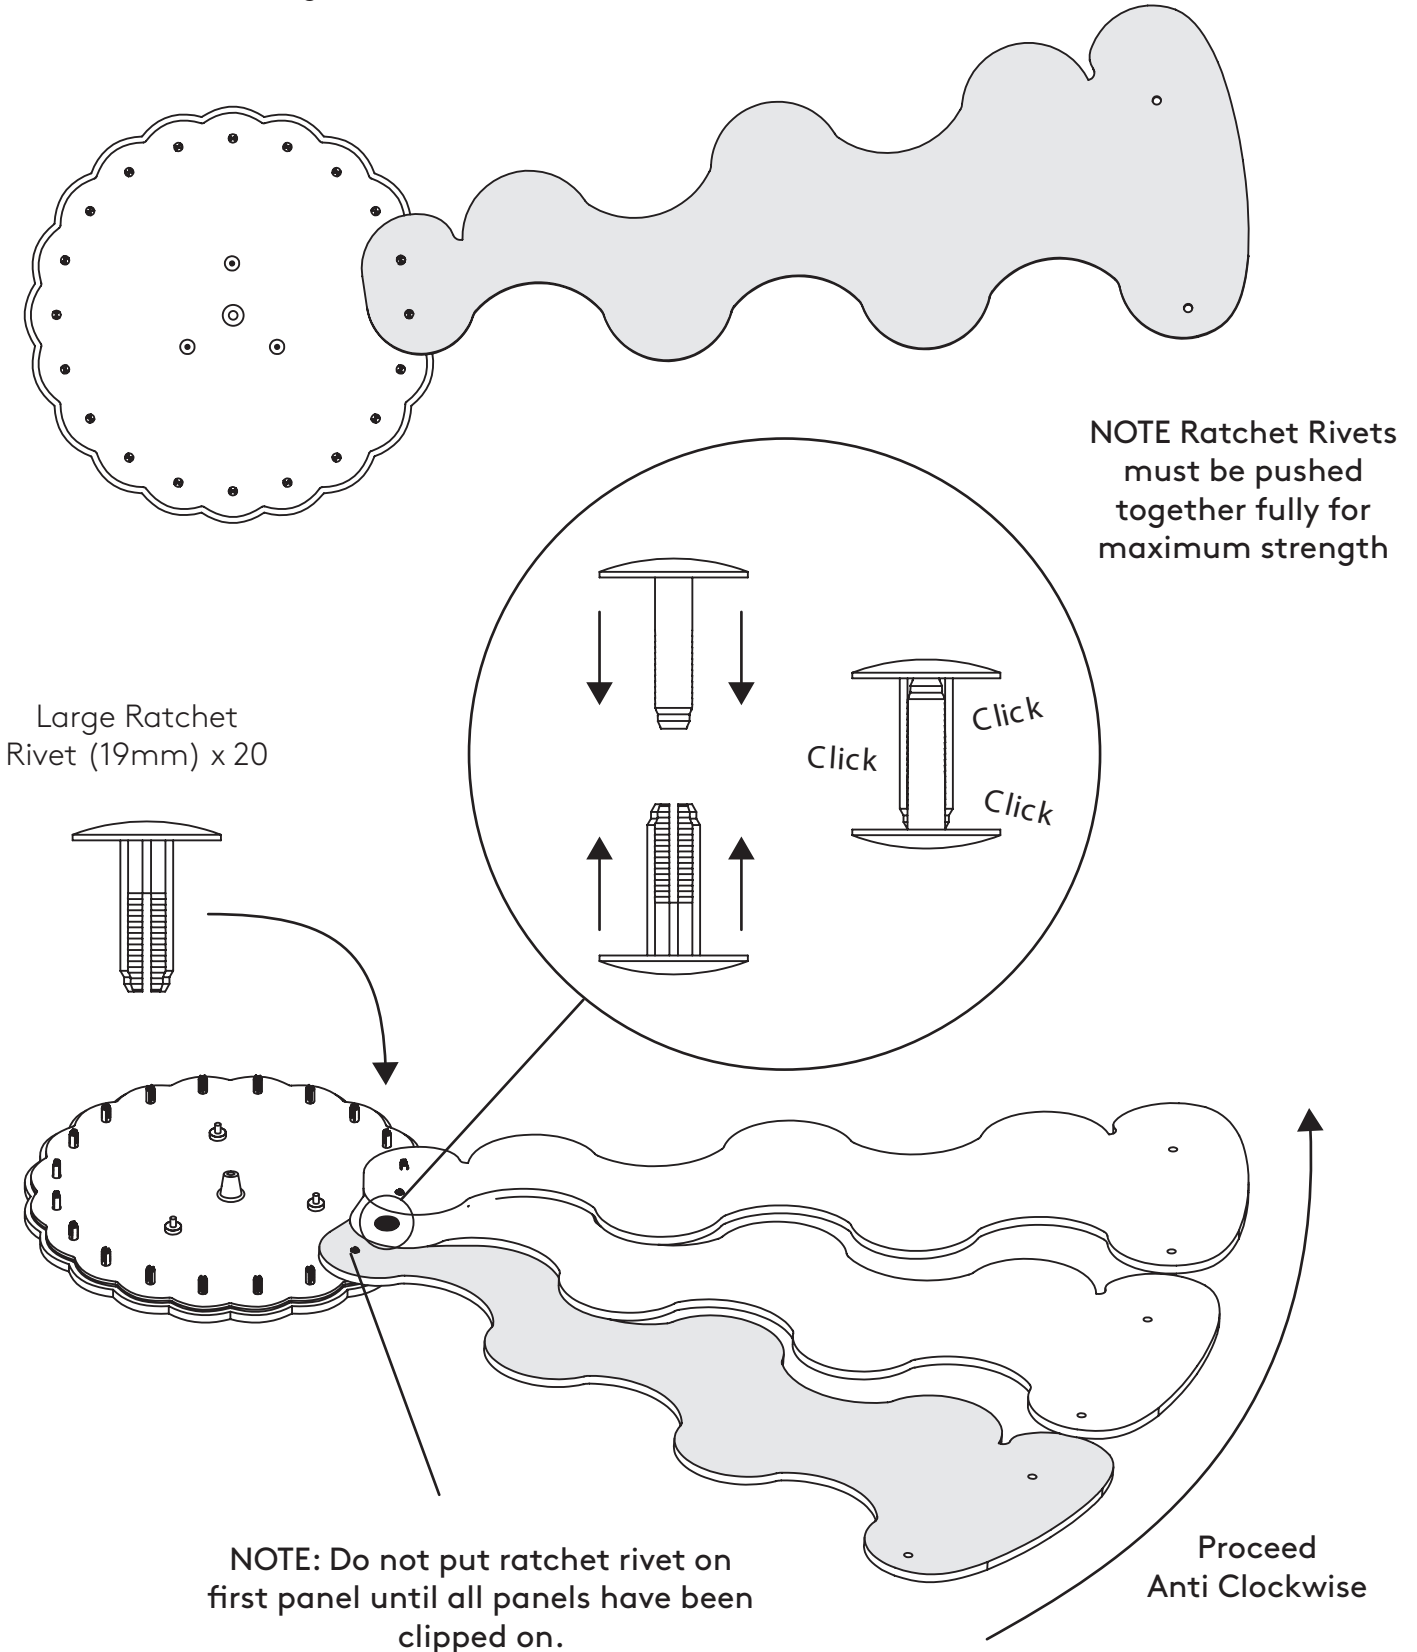


HUSH ROUND E26 BULB

Designed by David Trubridge


(1017-D)



Step 4 - Top Panel to Side Panel Assembly Continued

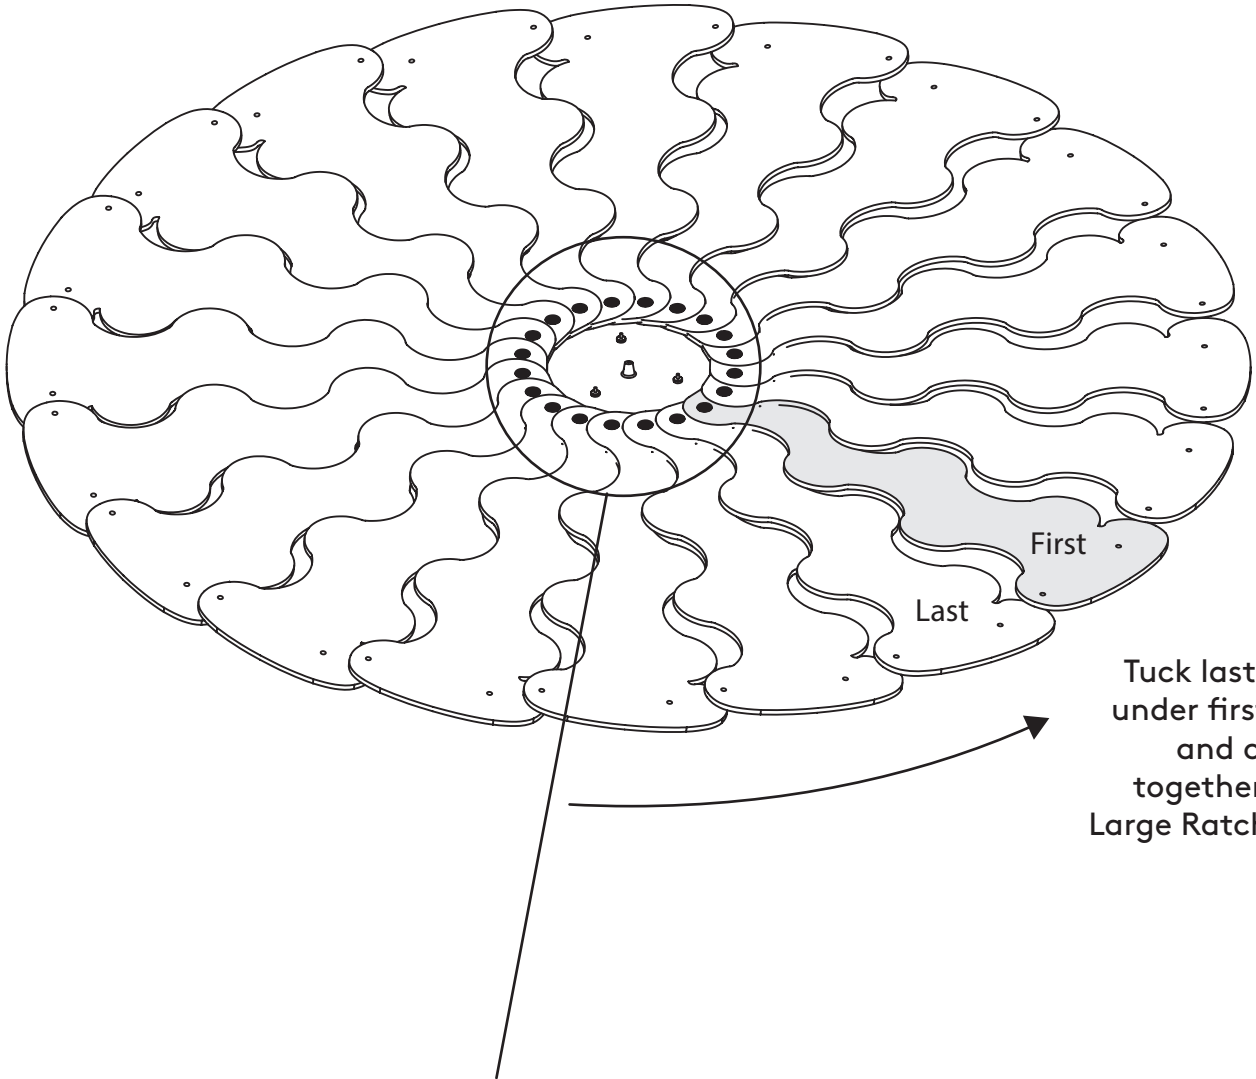

Cross Section Detail View of Top Panels overlapping.

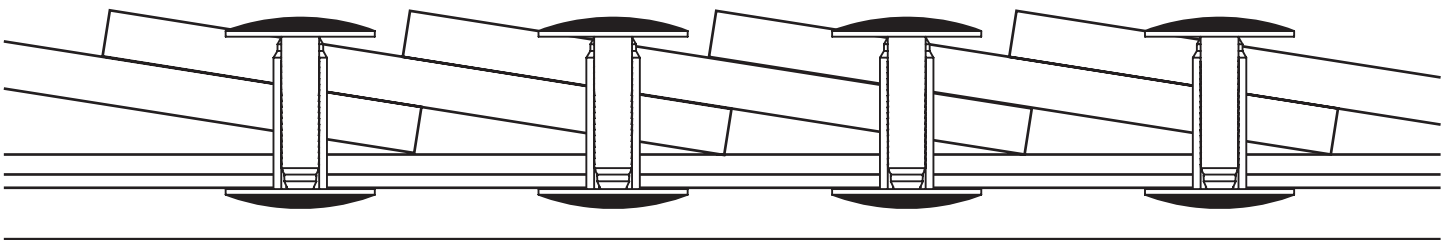

HUSH ROUND E26 BULB


Designed by David Trubridge
(1017-D)

pln.


Step 5 - Lifting into shape

Use suspension cable to lift the Hush Round approximately 650 mm (26 in) from the floor/surface.

The panels will begin to fall into their natural shape.

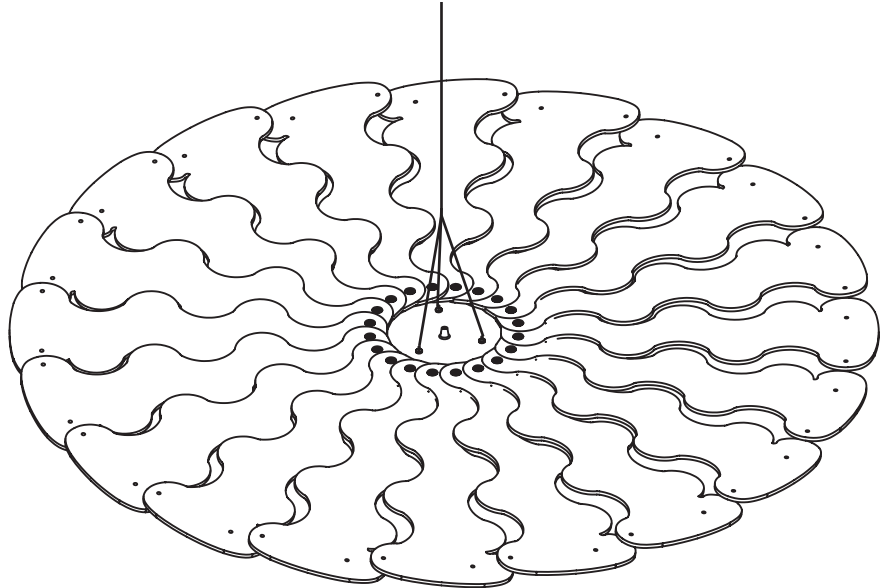

Use the folded cardboard pillar that was in the box (or similar-sized table) to prop it up.

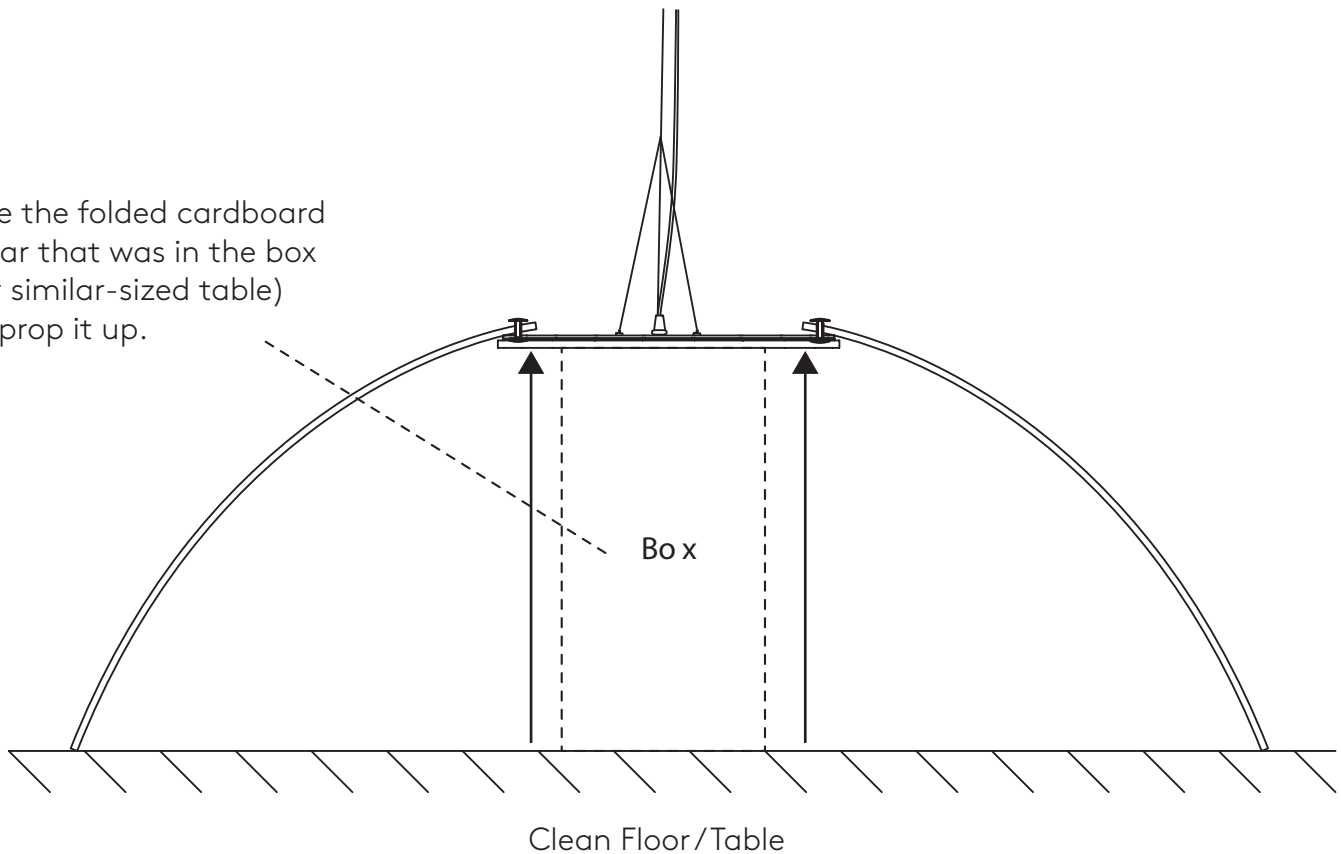

HUSH ROUND E26 BULB


Designed by David Trubridge

(1017-D)

pln.

Step 6A - Weaving of Panels - Exploded Detail

Bold Lines indicate the 'Ear' that sits on the outside of the Hush Round.
This weaving pattern is essential to lock the shape together

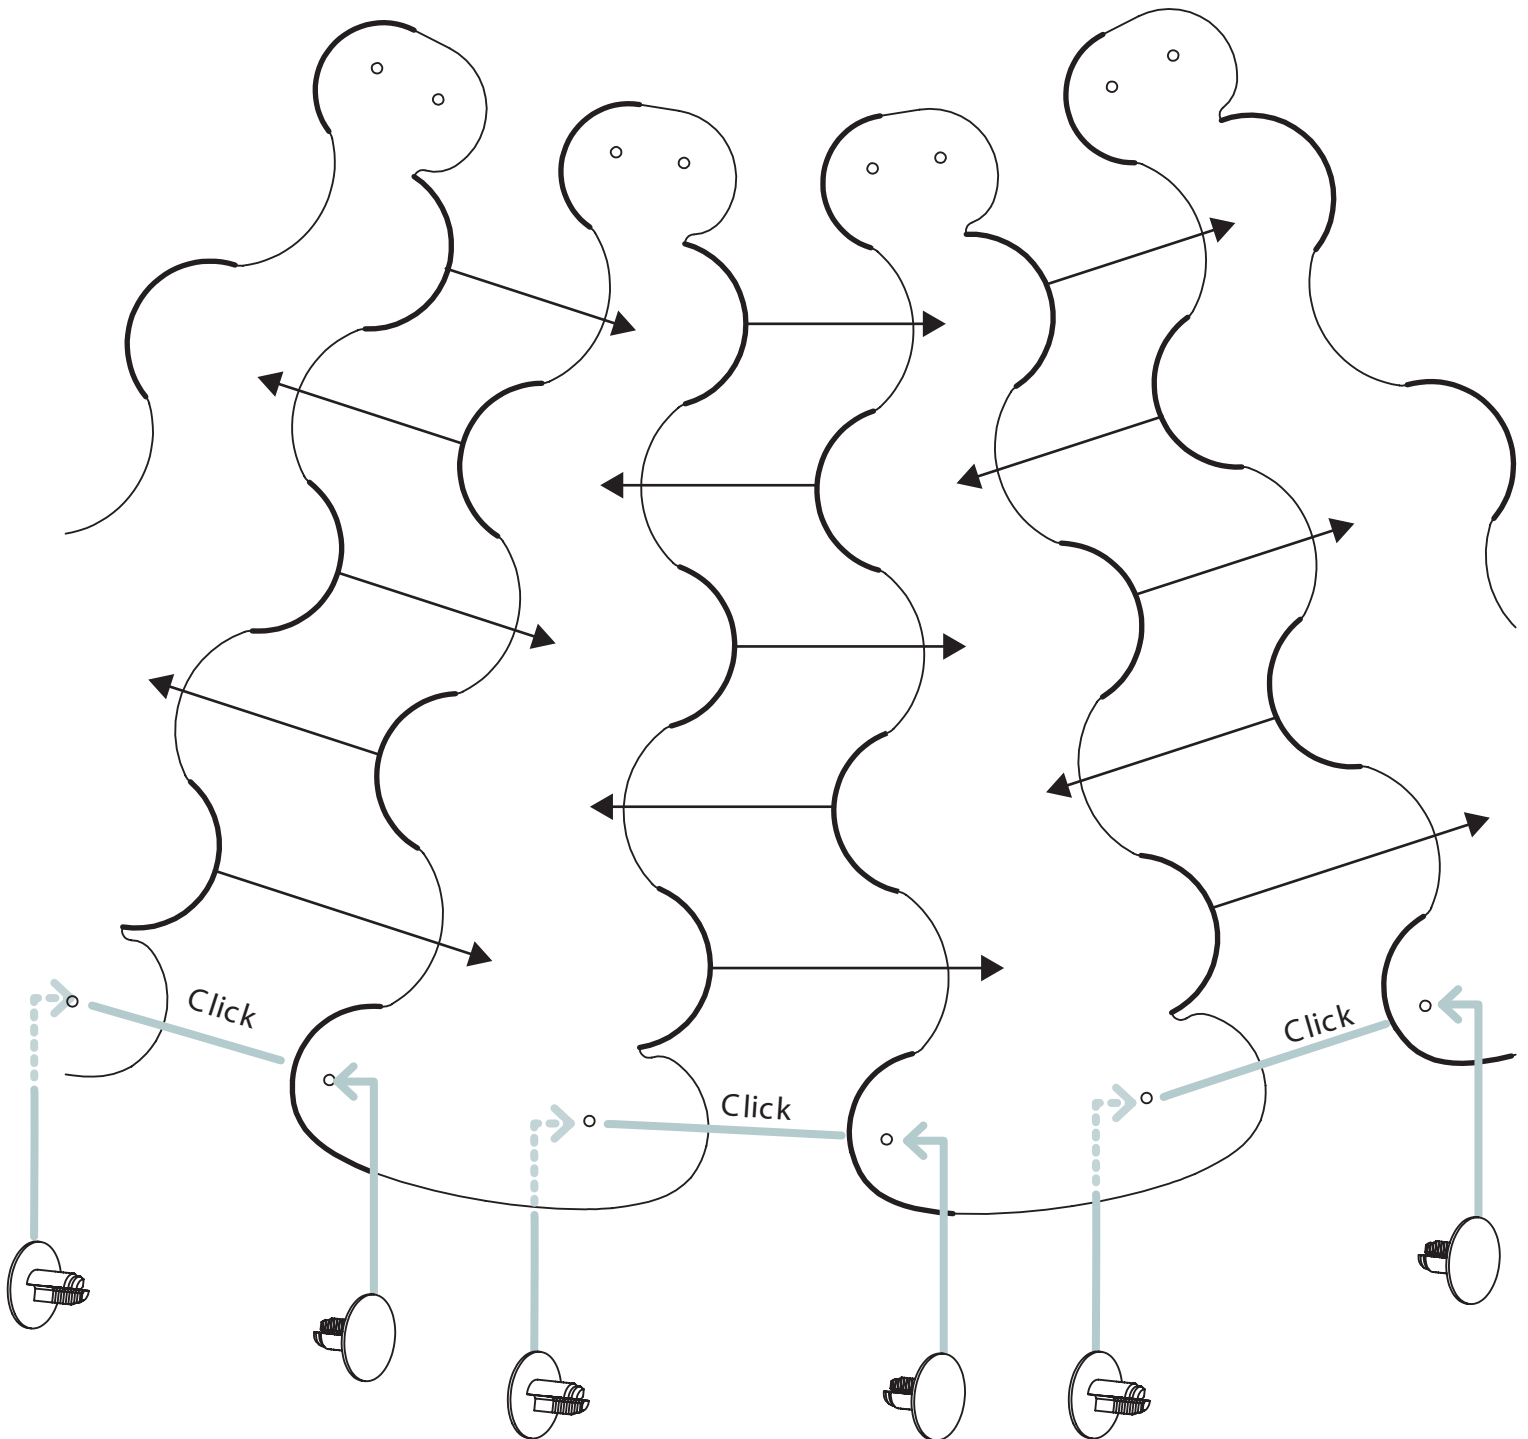

Once two panels are woven together, use two of the shorter Ratchet Rivets (13 mm) to lock them together.


HUSH ROUND E26 BULB

Designed by David Trubridge

(1017-D)

pln.

Step 6A - Weaving of Panels - Finished Detail

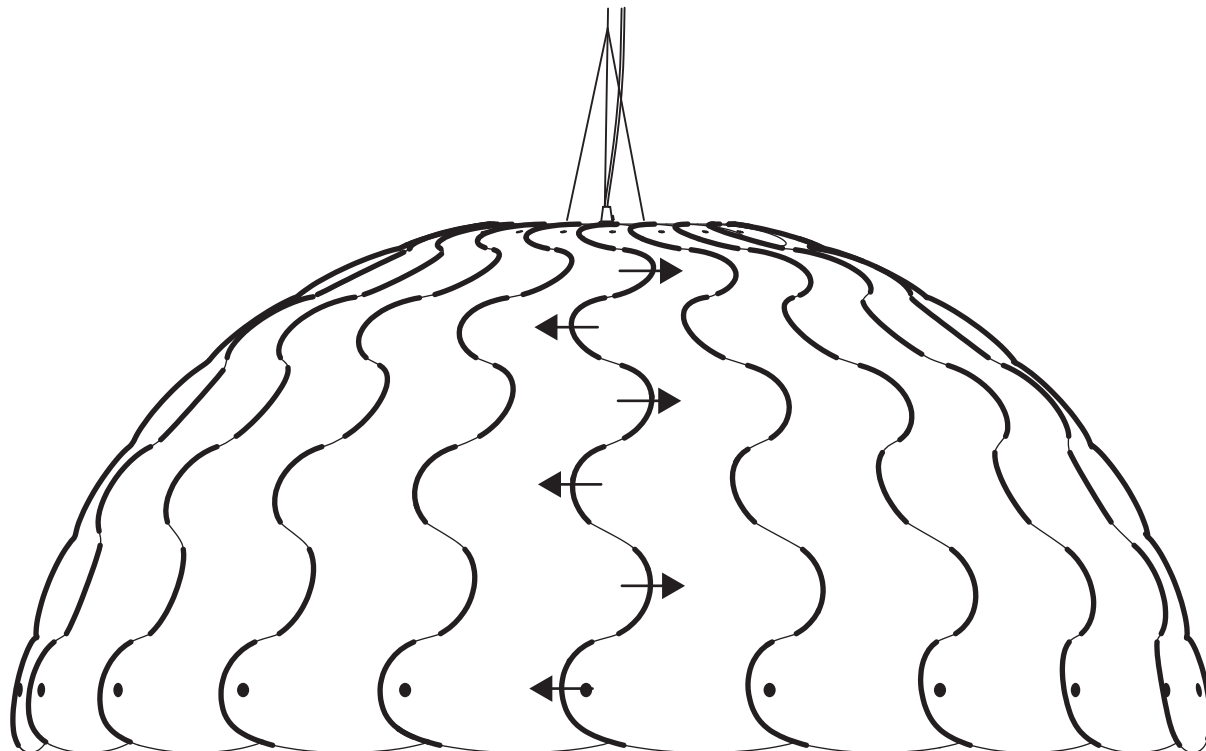

Bold Lines indicate the 'Ear' that sits on the outside of the Hush Round.
This weaving pattern is essential to lock the shape together

HUSH ROUND E26 BULB

Designed by David Trubridge
(1017-D)


pln.

Step 7 - Height Adjustment and Levelling

Ceiling Mounting Point.

If installing into wood use a countersunk timber screw (not supplied) to affix cone grip to ceiling.

If installing into concrete use countersunk anchor bolt (not supplied) to affix cone grip to ceiling.

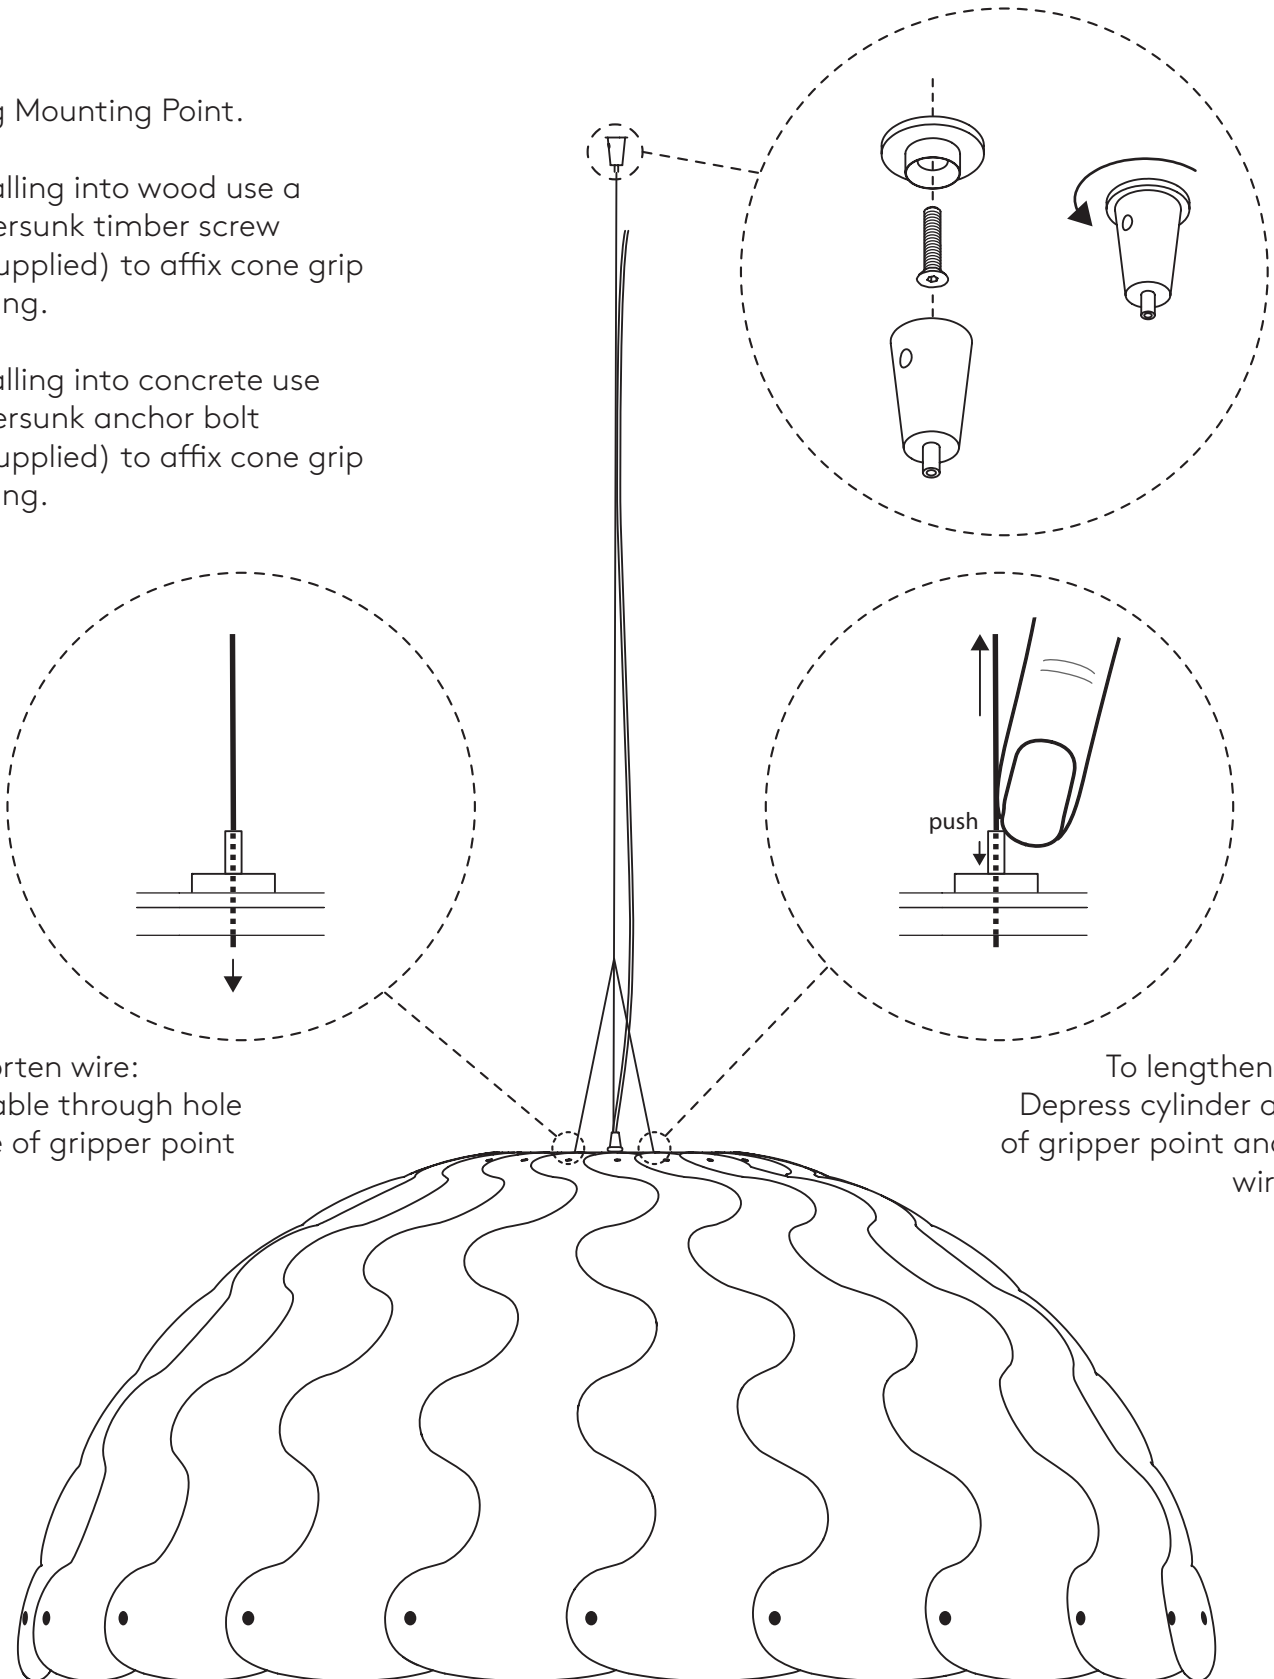

HUSH ROUND E26 BULB

Designed by David Trubridge

(1017-D)

pln.

Step 8 - Electrics with Hanging Ceiling

